


Preliminary Specification

Features

- InGaAs PIN-PD
- InGaAs PIN-PD TIA
- InGaAs APD TIA
- 1000~1600nm wavelength range
- Operating at 155Mbps to 4.25Gbps
- High sensitivity
- RSSI(I-sink, I-source) function
- Pigtail, receptacle type
- Single mode and multi mode fiber package
- Reliability (GR-468-CORE) compliance
- RoHS compliance
- Safety and Flammability (UL 94 V-0)
- Operating case temperature range : -40 ~ +85 °C

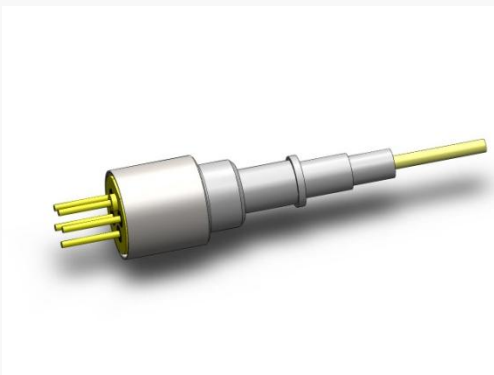

Applications

- ATM, SDH, SONET
- Access Network
- FTTx
- Test and measurement
- CATV receiver